
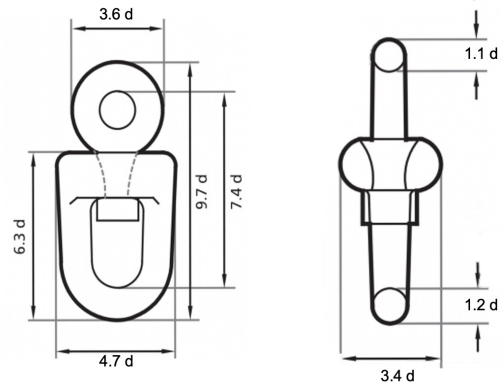


Swivel Forerunner Assembly

Swivel Forerunner is the most common rotating link on the ship. The Swivel Forerunner is a length of chains with a fixed structure, which is commonly made up of 5 parts: End Link, Enlarged Link, Swivel Shackle, Enlarged Link, Common Link.

The Swivel Forerunner allows the anchor to rotate without twisting the chain itself. Jeyco Australia can supply alternative configurations upon request.

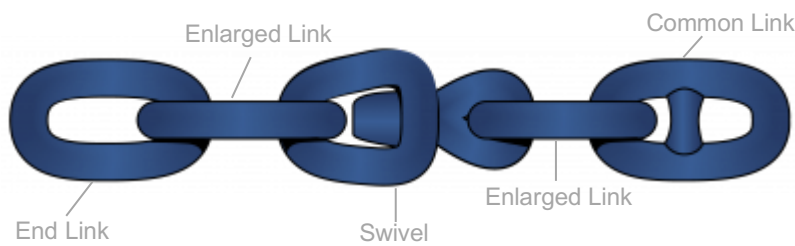

All dimensions are approximate
d = Diameter

Diameter (mm)	GRADE U2		GRADE U3		Swivel Only	E+EL+SW+EL+C
	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (kg)	Weight (kg)
12.5	6.73	9.38	9.38	13.51	0.7	2.5
14	8.36	11.73	11.73	16.89	0.9	2.8
16	10.91	15.30	15.30	22.03	1.1	3.1
17.5	12.95	18.25	18.25	26.10	1.8	4.4
19	15.30	21.52	21.52	30.69	2.4	5.8
20.5	17.85	24.88	24.88	35.59	3.0	7.2
22	20.39	28.55	28.55	40.89	3.6	8.9
24	24.17	33.85	33.85	48.54	4.7	11.5
26	28.35	39.67	39.67	56.70	6.0	14.6
28	32.73	45.79	45.79	65.47	7.3	18.0
30	37.53	52.41	52.41	74.95	9.1	22.3
32	42.52	59.45	59.45	84.94	10.5	26.4
34	47.72	66.79	66.79	95.55	13.1	32.2
36	53.33	74.64	74.64	107.07	16.0	38.7
38	59.25	82.80	82.80	118.29	18.5	45.2
40	65.26	91.37	91.37	130.52	20.5	51.9
42	71.69	100.03	100.03	142.76	25.0	61.1
44	78.42	110.13	110.13	157.04	28.0	69.5
46	85.35	119.31	119.31	171.31	31.0	78.4
48	92.59	130.52	130.52	184.57	35.0	89.0
50	100.03	139.70	139.70	199.86	42.0	102.8
52	108.09	150.92	150.92	215.16	48.0	116.3
54	116.25	162.13	162.13	231.48	53.0	129.6
56	124.41	174.37	174.37	247.79	60.0	145.4
58	131.54	184.57	184.57	265.13	65.0	160.0
60	140.72	197.82	197.82	282.46	71.0	176.3
62	149.90	210.06	210.06	299.80	79.0	195.0
64	159.08	223.32	223.32	319.17	87.0	214.2

Diameter (mm)	GRADE U2		GRADE U3		Swivel Only	E+EL+SW+EL+C
	Proof Load (Tonne-F)	Break Load (Tonne-F)	Proof Load (Tonne-F)	Break Load (Tonne-F)	Weight (KG)	Weight (KG)
66	169.27	235.55	235.55	336.51	95.0	234.7
68	178.45	249.83	249.83	356.90	107.0	260.6
70	187.63	263.09	263.09	376.28	117.0	283.8
73	202.92	284.50	284.50	406.87	132.0	321.1
76	219.24	306.93	306.93	438.48	145.0	358.6
78	230.46	322.23	322.23	458.87	158.0	388.7
81	245.75	344.66	344.66	491.50	170.0	428.9
84	263.09	368.12	368.12	526.17	190.0	478.0
87	280.42	392.59	392.59	560.84	210.0	529.4
90	297.76	417.06	417.06	595.51	240.0	594.8
92	309.99	536.37	536.37	619.99	250.0	629.4
95	329.37	459.89	459.89	656.70	280.0	697.4
97	341.60	477.23	477.23	682.19	290.0	734.9
100	359.96	503.74	503.74	719.92	330.0	817.4
102	373.22	522.09	522.09	746.43	340.0	855.4
105	393.61	549.63	549.63	785.18	390.0	952.3
107	405.85	567.98	567.98	784.16	400.0	996.4
111	433.38	605.71	605.71	864.72	450.0	1115.3
114	452.75	635.28	635.28	906.53	500.0	1221.6
117	474.17	663.84	663.84	948.34	540.0	1321.3
120	495.58	694.43	694.43	991.16	553.0	1392.3
122	509.86	713.80	713.80	1018.7	620.0	1504.8

Additional sizes available upon request